


# Model 75-2 Servo

BREAD BAGGER

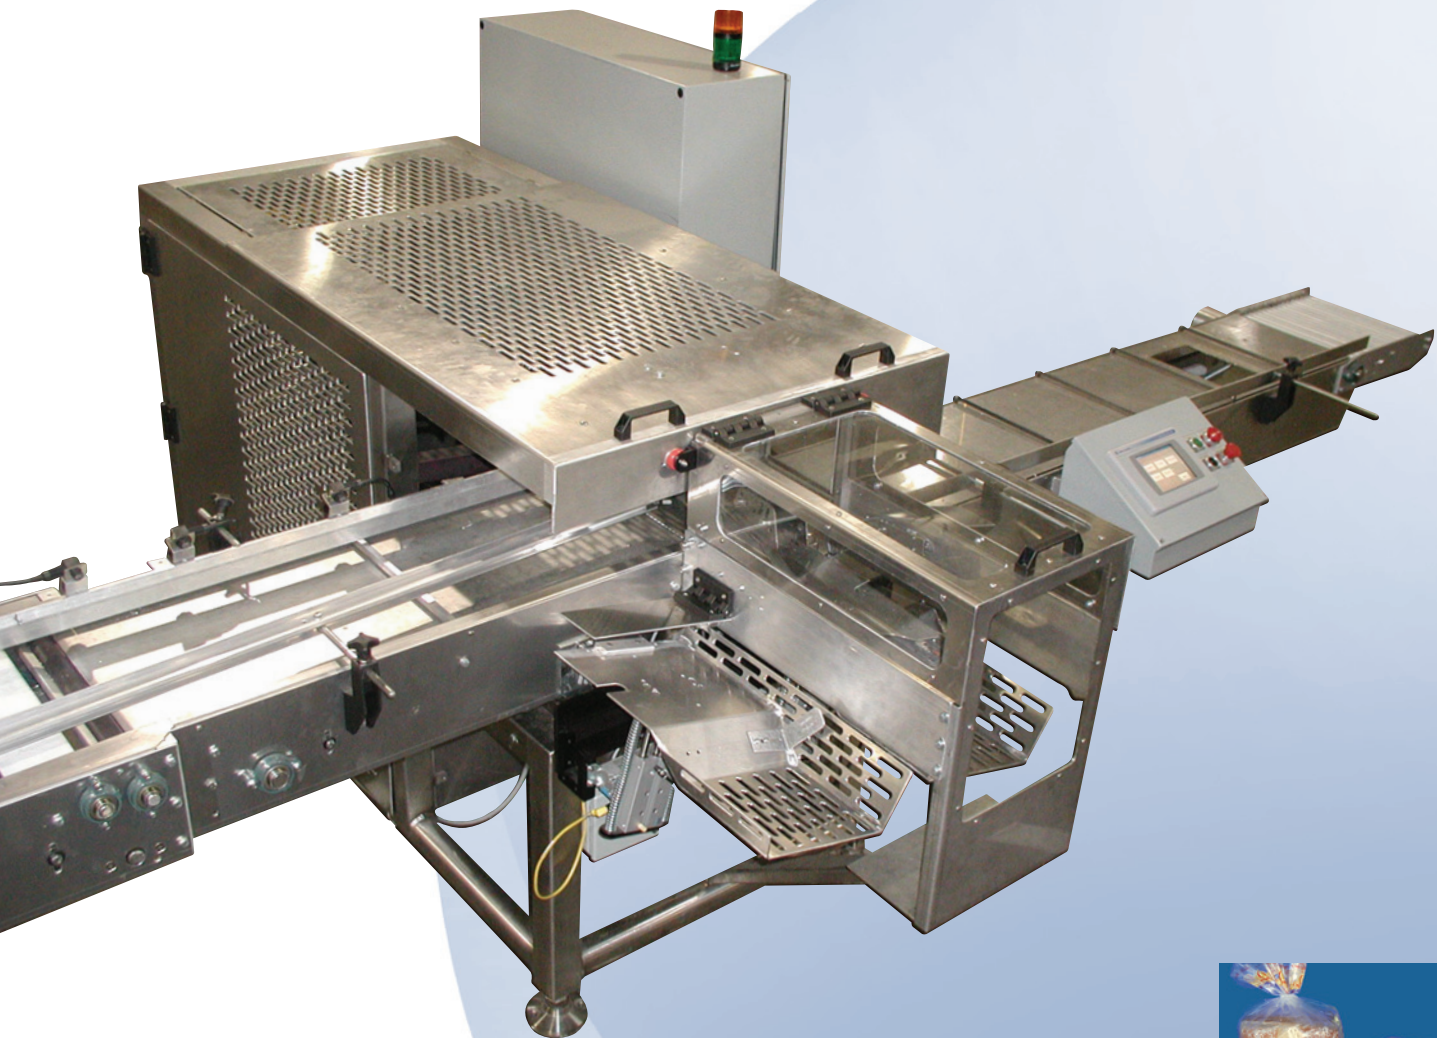

## West Coast Sales & Manufacturing

19216 S. Laurel Park Road Rancho Dominguez, CA 90220

Tel: 310.635.8121 • Fax: 310.635.8171

sales@ubeusa.com

## Mid-West Sales & Manufacturing

15815 W. 110th Lenexa, KS 66219

Tel: 913.541.8700 • Fax: 913.541.0781

officeks@ubeusa.com

www.ubeusa.com



The Model 75-2 combines years of step by step improvements into a servo driven reciprocating bagger with fewer moving parts & increased reliability at high speed.

## Specifications

### Bagging speed

up to 75 loaves per minute

### Min. / max. loaf size

7" x 3" x 3" / 16" x 6" x 6" (l-w-h)

[177 x 76 x 76mm / 406 x 152 x 152 mm] (l-w-h)

### Electrical

208/230/380/460 v, 3 ph, 50/60 hz

### Air requirements

6 cfm @ 90 psi dry filtered

## Features

- Tubular stainless steel frame (paint free construction)
- Drive system with strong gear box for high speed production
- Simple pivot arm motion replaces scoop slide
- AB Control Logix and Kinetix Servo Drives on a Sercos network
- Servo drives replace all cams and provide independent servo drives for infeed, outfeed and slicer drives
- Dual table automatic bag changer; Top & bottom air jets with missed bag detection
- Programmable scoop height infeed phase change and scoop dropout timing
- AB Panel View 600 plus color touch screen Ethernet communication

## Options

- Automatic speed control for entire packaging room
- Extended discharge conveyor or special length infeed
- One piece combination slicer discharge with bagger infeed
- CE Approval, guards and coded magnetic door switches
- UL Approval
- CSA Approval
- Available in metric construction (where possible)

## Technical Layout:

